






Version A

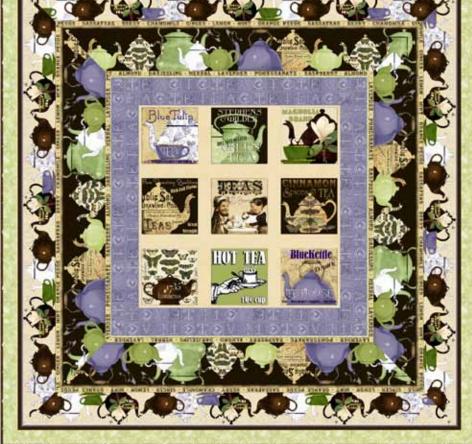

Designed By: J. Wecker Frisch Finished Topper Size: 49" x 49"

Version B











22417 JH



22422 H



22420 A



(Binding)



22419 E (Backing)

 FABRIC REQUIREMENTS

 Design:
 Yards

 22416 E
 1 Panel

 22417 JH
 15/8

 22422 H
 3/8

 22420 A
 1/2

 22421 A (Binding)
 5/8

 22419 E (Backing)
 33/8

WOF = width of fabric from selvedge to selvedge.


Version A Cutting Directions

22416 E: Short & Stout Panel

• Trim half of the panel to 22" x 22" square, including 9 motifs in the square. (Set aside remaining half of panel for Version B topper.)

22417 JH: Teapot Border Stripe

• Cut (4) 9¾" x 54" strips for third border, cutting ¼" beyond the narrow dark brown stripe into the stripe area and ¼" below the dark brown teapot stripe into the tan word stripe area.



22422 H: Green Texture

• Cut (4) 2" x **WOF** strips; recut into (4) 2" x 35" strips for second border.

22420 A: Tan Texture

• Cut (4) $3\frac{1}{2}$ " x **WOF** strips; recut into (4) $3\frac{1}{2}$ " x 32" strips for first border.

While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which individual work varies.

22421 A: Dark Brown Teapot Print

• Cut (6) 2½" x WOF strips for binding.

22419 E: Tan Teacup Print (Backing Only)

• Cut (2) 57" x **WOF** strips.

Topper Assembly

Use a 1/4" seam allowance throughout.

- 1. Center and sew a green border strip to a teapot border strip. Press seam toward the teapot border strip. Center and stitch a tan border strip to the green strip. Press seam toward the green strip.
- 2. Mark the center of the teapot border strip edge. Measure 25½" to one side of the center mark and make another mark. Repeat on the other side of the center mark. Trim the ends of the pieced border strip at a 45-degree angle beginning at the outer mark at each end of the border.



- **3.** Repeat steps 1 and 2 to complete 4 border strips total.
- **4.** Mark the center of each side of the panel square with a pin.





- **5.** Center a border strip right sides together on one side of the panel square. Stitch in place, beginning and ending ½" from each corner of the panel square and locking stitches at each end. Fold the ends of the border out of the way. Repeat to stitch the remaining border strips on each side of the panel square.
- 6. Match the diagonal ends of (2) border strips with right sides together. Stitch the diagonal seam, beginning exactly at the end of the border seam and locking stitches at each end. Repeat to stitch the diagonal seam at each corner. Press the diagonal seam open and the border seams toward the borders to complete the top.
- 7. Remove the selvedge edges from the backing pieces. Join the pieces on a long edge with a ½" seam allowance. Press seam open. Trim the side edges to make a 57" x 57" backing piece.
- **8.** Layer, quilt and bind, using your favorite methods and the dark brown teacup print binding strips, to complete the quilt.











22417 JH



22422 H



22420 W



22421 A (Binding)



22418 E (Backing)

WOF = width of fabric from selvedge to selvedge.

Version B Cutting Directions

22416 E: Short & Stout Panel

• Trim half of the panel to 22" x 22" square, including 9 motifs in the square.

22417 JH: Teapot Border Stripe

• Cut (4) 9¾" x 51" strips for second border, cutting ¼" beyond the narrow dark brown stripe into the stripe area and ¼" below the dark brown teapot stripe into the tan word stripe area. (Refer to the cutting diagram for Version A.)

22422 H: Green Texture

• Cut (6) 2" x **WOF** strips for third border.

22420 W: Purple Texture

• Cut (4) $3\frac{1}{2}$ " x **WOF** strips; recut into (4) $3\frac{1}{2}$ " x 32" strips for first border.

22421 A: Dark Brown Teapot Print

• Cut (6) 2½" x **WOF** strips for binding.

22418 E: Tan Teapot Print (Backing Only)

• Cut (2) 57" x **WOF** strips.


While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which individual work varies.

KIT REQUIREMENTS				
		12 Kits	18 Kits	24 Kits
Design:	Yards	Bolts	Bolts	Bolts
22416 E	1 Panel	1	1	2
22417 JH	15/8	2	3	4
22422 H	1/2	1	1	1
22420 W	1/2	1	1	1
22421 A (Binding)	5/8	1	1	2
22418 E (Backing)	33/8	4	6	8

Topper Assembly:

Use a 1/4" seam allowance throughout.

- 1. Sew the green 2" x WOF strips short ends together to make a long strip. Press seams to 1 side. Cut into (4) 54" pieces.
- **2.** Center and sew a teapot border strip to a green border strip. Press seam toward the green strip. Center and stitch a purple border strip to the teapot border strip. Press seam toward the teapot border strip.
- 3. Mark the center of the green strip edge. Measure 251/8" to one side of the center mark and make another mark. Repeat on the other side of the center mark. Trim the ends of the pieced border strip at a 45-degree angle beginning at the outer mark at each end of the border.

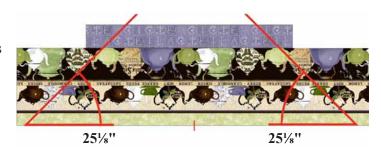

- **4.** Repeat steps 1 and 2 to complete 4 border strips total.
- **5.** Repeat steps 4–8 of the Version A instructions to complete the topper.