




Sailing for Home



Finished Size: 65 1/2 " x 77 1/2"

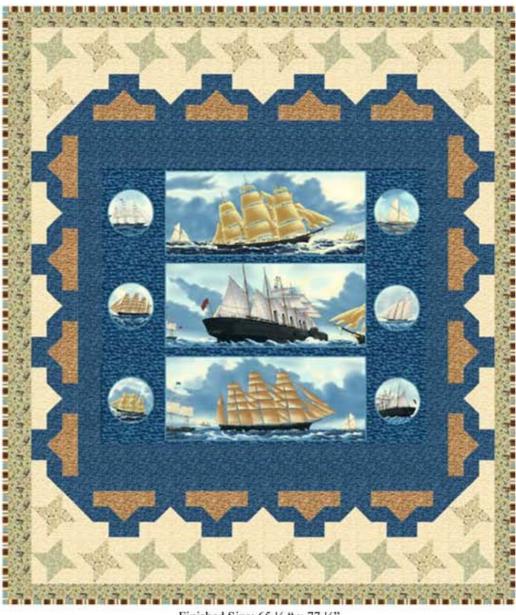











20647-N 1 panel

20651-N 13/4 yard

20651-E 13/4 yard

20651-A 1/8 yard

20650-H 1/8 yard







20657-N 3/8 yard



20658-BE 1/8 yard for binding 20649-E 41/4 yards for backing



Sailing for Home

Skill Level: Intermediate

Designed by: Peggy Smith Welchert

Finished Size: 65 1/2 " x 77 1/2"

Fabric

20647-N 1 panel

20651-N 13/4 yard

20651-E 13/4 yard

20651-A 1/8 yard

20650-H 1/8 yard

20657-B 3/8 yard

20657-N 3/8 yard

20658-BE % yard for binding

20649-E 41/4 yards for backing

Cutting:

Effort should be made to keep the direction of the wave pattern in fabrics 20651-N, 20651-E and 20651-A going in the same direction as the wave pattern in the 20647-N panel.

20647-N cut panel 38"x 42"

20651-N cut:

2 pieces across the width of the fabric 5 1/2" x 42"

2 pieces lengthwise of the fabric 3 1/2" x 48"

Using the remaining 35" width cut:

2 strips 2 1/2" x 35" subcut into (14) 2 1/2" x 4 1/2"

1 strip 4 ½" x 35" subcut into (14) 2 ½" x 4 ½"

3 strips 2 1/2" x 35" subcut into (40) 2 1/2" squares

3 strips 2 1/8" x 35" subcut into (28) 2 1/8" squares

1 strip 3" x 35" cut into (6) 3" squares

20651-A cut:

2 strip 2 1/2" x width of fabric subcut into (8) 2 1/2" x 8 1/2"

1 strip 8 1/2" x width of fabric subcut into (8) 2 1/2" x 8 1/2"

1 strip 5 1/4" x width of fabric subcut into (3) 5 1/4" squares

20651-E cut:

1 strip 8 1/2" by width of fabric subcut 6 pieces

2 1/2" x 8 1/2", 4 pieces 2 1/2" x 4 1/2" and (3) 5 1/4 squares.

8 strips 2 1/2" by width of fabric subcut into 6 pieces

2 1/2"x 8 1/2", 4 pieces 2 1/2"x 4 1/2" and (92) 2 1/2" squares

4 strips 3" by width of fabric subcut into (50) 3"squares

20657-B cut:

1 strip 2 ½" x width of fabric subcut into (12) 2 ½" square

2 strips 3" x width of fabric subcut into (24) 3" squares

20657-N cut:

1 strip 2 1/2 "x width of fabric subcut into (12) 2 1/2" square

2 strips 3" x width of fabric subcut into (24) 3" squares

20650-H cut:

7 strips 2 3/4" x width of fabric

Sewing

Press all seams open. Use 1/4" seam allowance.

1. Sew the 5 1/2" strips of 20651-N to the top and bottom of panel 20647-N. Sew the 3 1/2" x 48" pieces of 20651-N to the sides of the panel. Set aside.

Make "flying geese" units. Place 14 of the 2 %" of 20651-N squares in one pile and the other 14 in another pile making sure the pattern on the fabric is going from side to side. On the back side of each square mark one pile diagonally from upper left corner to lower right corner and the other pile from upper right corner to lower right corner. See figure 1.



Figure 1

3. Place one 5 1/4" square of 20651-A right side up on table. Place two of the marked 2 1/8" squares right side down so the diagonal lines on the squares are continuous from corner to corner and the square overlap. See figure 2. Notice the fabric pattern on the little squares go in the opposite direction from the pattern on the 5 1/4"



Figure 2

Figure 3

4. Sew 1/4" either side of the diagonal line. Cut in two on the diagonal line as shown in figure 3.

Press seams open as in figure 4.




Figure 4

Place unit right side up on table. Place a 2 1/8" square so the diagonal line goes from the corner to the center. Check to be sure the fabric patterns are going in the opposite directions. Sew 1/4" either side of the line and cut between the sewn lines. See figure 5.



Figure 5

Press seam open. Repeat with the remaining 5 1/4" squares of 20651-A and 20651-E.

- Place all 3" squares of 20651-E right side down with the pattern all going the same direction. Mark the back of 25 squares diagonally from upper left to lower right and 25 diagonally from upper right to lower left.
- Place one 3"square of 20651-N right side up on table. Place one square that is marked from the upper left to lower right, right side down so the pattern on the fabric goes in the opposite direction. Sew

'4" on either side of the line. Cut on line and press seams open. Repeat 2 times. Make 3 more units with squares that are marked from upper right to lower left. Four half square units will be left over for the corner of Friendship Stars.

- 8. Assemble border keeping the fabric pattern going in the same direction using the 2 ½"x 4 ½", 2 ½"x 8 ½" of 20651-N, 20651-A, 20651-E and 20651-N 2 ½" squares plus the units just made. See figures 6, 7 and 8. Assemble rows into 4 units like in figure 9. Set aside.
- 9. To make Friendship Stars place one 3" square 20657-B right sides up and one marked 3" square 20651-E right side down together and sew on either side of the line. Repeat using all of the marked squares. Cut on the lines and press seams open. Using the remaining 2 ½" squares, assemble the stars as in figures 10, 11 and 12.
- 10. To assemble the quilt sew the large blocks (5 ½" x 42") of 20651-N to top and bottom edges of the center block, then the remaining blocks of 20651-N to each side edge. The waves should be going in the same direction as the waves in the center block.
- 11. Sew a border unit completed in #8 above to the side edges. Sew a Friendship Star with the 20651-E/ 20651-N corner to each end of the remaining 2 border units. Keep the waves going in the same direction and arrange the 20651-N triangle and 20651-N square next to each other. Sew these borders to the top and bottom edges.
- 12. Sew the remaining Friendship Stars together, creating two rows, as seen in quilt image. Sew one to the top and one to the bottom of the panel unit.
- 13. Sew together 20650-H 2 ¾" strips to make border. Measure the length of the quilt and cut 2 pieces that same length and sew to each side. Measure the width of the quilt and cut 2 pieces that length. Sew to top and bottom edges.

Use fabric 20649-E for the backing and 20658-BE cut 2 1/2" wide for the binding.

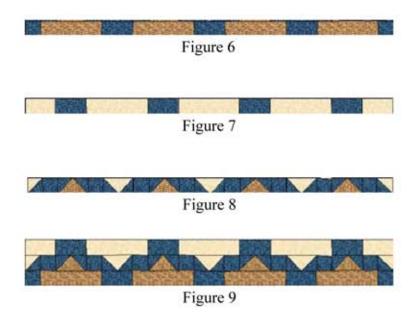








Figure 11



Figure 12

While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which an individual work varies.